


***kuraray***



**KURARAY LIQUID RUBBER**

# Stick to it - KURARAY LIQUID RUBBER *for long lasting product solutions*

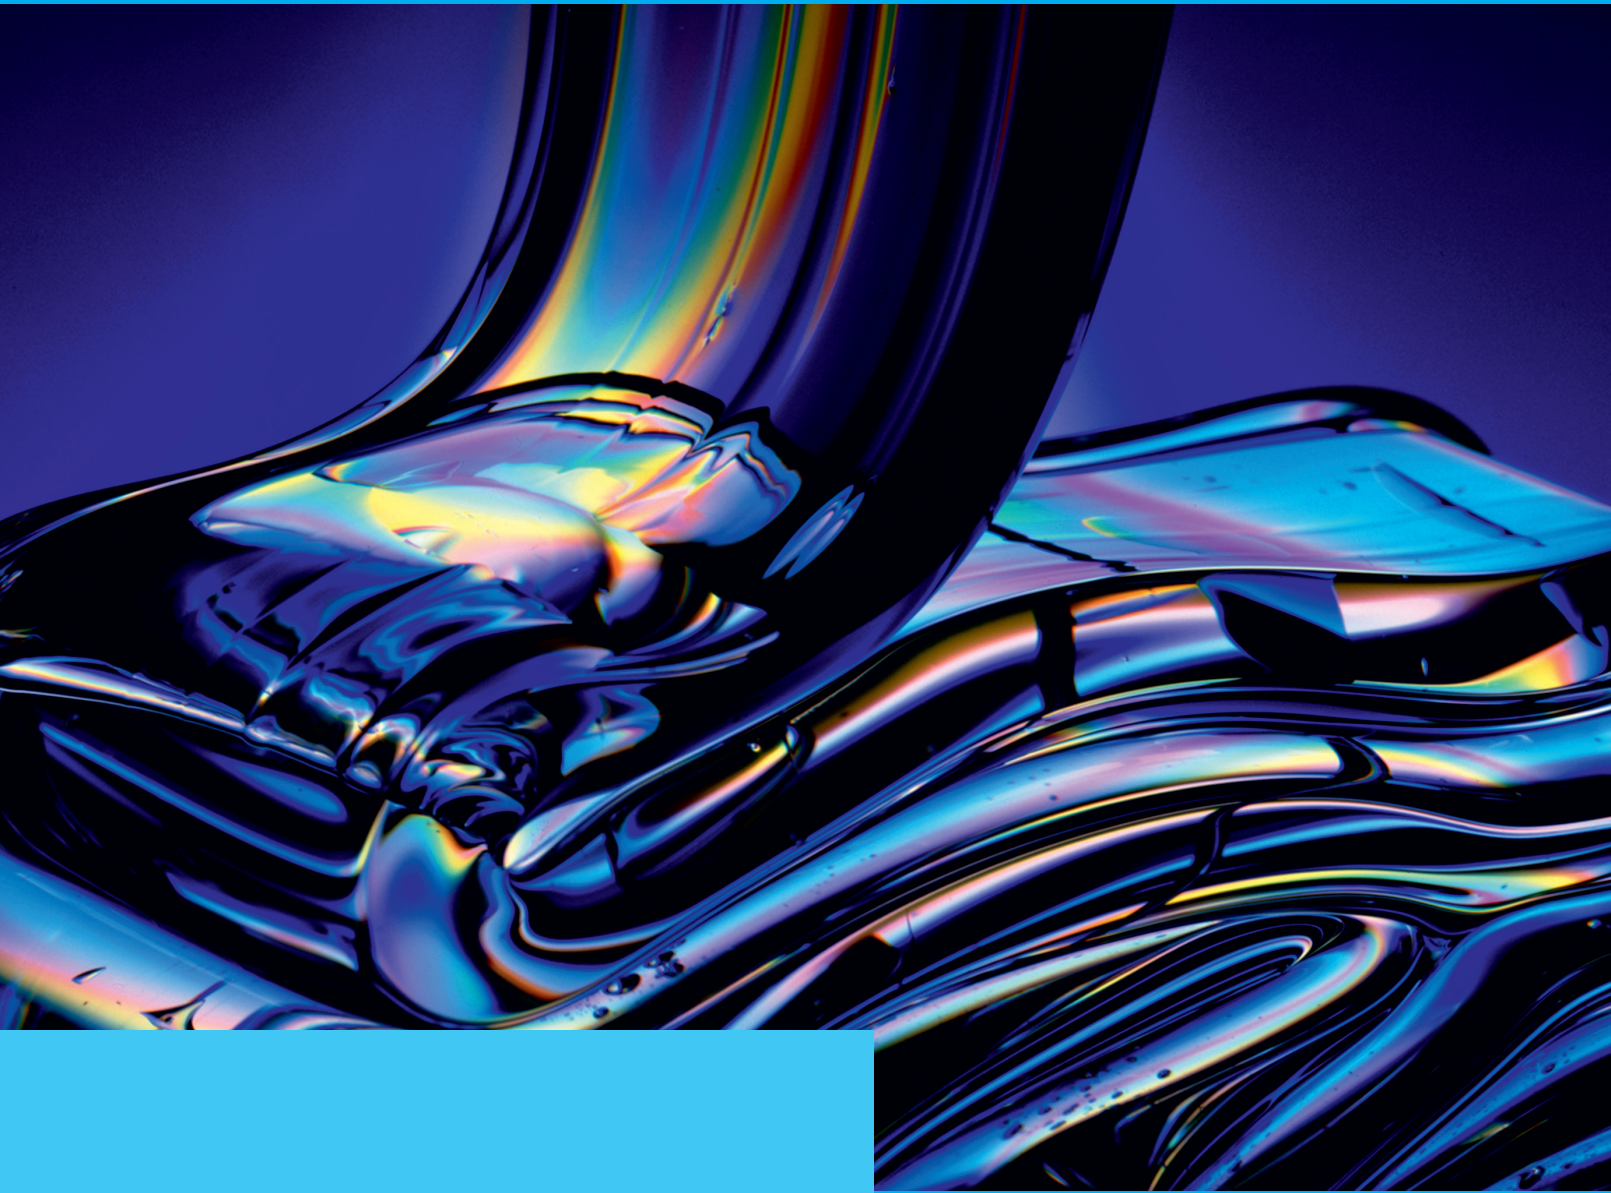

KURARAY LIQUID RUBBER includes Liquid Isoprene Rubber (LIR) and Liquid Butadiene Rubber (LBR). These high-viscosity synthetic rubbers are based on isoprene, butadiene and styrene. They are colorless, transparent and almost entirely odorless with low VOC's.

KURARAY LIQUID RUBBER grades function as reactive plasticizers but have far higher molecular weight than normal plasticizers. They are co-vulcanizable and reduce migration significantly which improves the product's shelf life. Using KURARAY LIQUID RUBBER during the rub-

ber compounding phase significantly reduces processing time while maintaining the rubber compounds' physical properties. This results in a product with lower processing costs.

The functionalized grades can be bonded to a wide variety of matrices for improved performance.

Common applications include tires, belts, hoses and other rubber goods. In addition, KURARAY LIQUID RUBBER is used to produce high performance coatings, adhesives and sealants.

## FOR TIRES



## FOR RUBBER APPLICATIONS



## FOR ADHESIVES



## FOR COATINGS & SEALANTS





## ■ KURARAY LIQUID RUBBER IN TIRES

KURARAY LIQUID RUBBER is a favored component in the production of high performance tires. It reduces Mooney viscosity which minimizes migration while improving the processability of the rubber compound in tires.

KURARAY LIQUID RUBBER enhances tire performance significantly by simultaneously controlling the balance of grip, fuel efficiency and wear resistance. KURARAY LIQUID RUBBER is crosslinkable for superior performance and longer shelf life.

- Functionalized grades improve adhesion to metal
- Co-vulcanizable characteristics prevent oil migration
- Improved silica/carbon black dispersion in certain formulations
- Glass transition temperature (T<sub>g</sub>) control enables grip control in a wide temperature range



**KURARAY LIQUID RUBBER offers various application possibilities for tire manufacturing. Different grades can be processed in certain tire parts to contribute to a long lasting high quality product.**

### 1 *Beadfiller / APEX:*

High hardness with excellent processability  
Improved dimensional stability  
Better filler dispersion  
**Applicable grades: LIR-50**

### 2 *Side wall / Carcass:*

Improved dimensional stability  
Enhanced surface smoothness of calendered sheet  
Lower mill shrinkage  
Better green tackiness  
Higher production rates  
**Applicable grades:  
LIR-50, LBR-302, LBR-307**

### 3 *Rim cushion:*

Good balance of processability and physical properties  
Improved abrasion resistance  
**Applicable grades: LIR-50**

### 4 *Tread:*

Improved dynamic and physical properties (tan $\delta$ )  
Excellent abrasion resistance, wet and ice grip  
Excellent extrudability  
**Applicable grades:  
LIR-50, LBR-302, LBR-307,  
L-SBR-820, L-SBR-841**

### 5 *Cushion:*

Enhanced surface smoothness of calendered sheet  
Reduced extrusion temperature  
Better green tackiness  
Improvement of dynamic properties  
**Applicable grades: LIR-50, LBR-302, LBR-307**





## ■ KURARAY LIQUID RUBBER IN RUBBER APPLICATIONS

KURARAY LIQUID RUBBER is processed in various rubber goods besides tires. Typical applications include anti-vibration rubber compounds, fenders, conveyer belts, rubber hoses and gaskets. LIR and LBR deliver a balanced performance including longer shelf life with minimal migration.

- Selected grades are suitable for EPDM applications
- Improved processability due to lower Mooney viscosity
- Co-vulcanizable with base rubber such as NR/IIR/SBR/BR/EPDM which reduces migration
- Improved adhesion to metal possible with functionalized grades
- Colorless and odorless with low VOC's

The following formulation illustrates the benefit of using LIR-50 in an extrusion.

Formulation	Control 1	Control 2	LIR-50 formulation
NR (RSS #3)	70	66	66
SBR 1502	30	30	30
Process Oil (Aromatic)	-	4	-
KURARAY LIQUID RUBBER LIR-50	-	-	4
CB (FEF)	50	50	50
ZnO No. 1	5	5	5
Stearic Acid	2	2	2
Sulfur	2.2	2.2	2.2
Accelerator CBS	1.2	1.2	1.2
Antioxidant IPPD	1	1	1

### [Mixing]

1 BR Banbury Mixer : 6min  
2 8 inch Roll : 10min


### [Garvey die extrusion test (ASTM D2230)]

(Test Conditions)

- Cylinder temp. : 90 °C
- Die temp. : 90 °C
- Screw rotation speed : 20rpm

Extruded Sample	Edge*	Surface*
Control 1	6	B
Control 2	6	B
LIR-50 formulation	10	A

\*) EDGE 10 (excellent) SURFACE A (excellent)



1 (poor)



E (poor)



## ■ KURARAY LIQUID RUBBER IN ADHESIVES


KURARAY LIQUID RUBBER is commonly used in adhesive applications such as pressure sensitive adhesives and hot melts. The lower molecular weight grades improve tack and adhesive properties. The UV crosslink-able grades provide excellent flexibility, tack, low shrinkage and moisture resistance which are ideal for flexible electronic applications.

- Preservation of rubber-like properties at low temperatures
- Colorless, transparent, odorless without halogen residuals
- Certain grades are suitable for food contact applications
- Improved adhesion to metal and glass possible with functionalized grades
- Crosslinkable by UV with methacrylic grades

### *Suitable grades of KURARAY LIQUID RUBBER in adhesives*

		LIR-30 LIR-50	LBR-302 LBR-307 LBR-305 LBR-352 LBR-361	LIR-390	LIR-290	LIR-403 LIR-410	UC-102M UC-203M	LIR-700	L-SBR-820 L-SBR-841
Solution	NR, IR	▪	▪						
	SBR	▪	▪						▪
	IIR	▪	▪		▪				
Latex	NR, SBR latex							▪	
Hot melt	SIS	▪	▪	▪	▪				▪
	SBS	▪	▪	▪	▪				▪
	SEBS, SEPS				▪				
	EVA				▪				
Crosslink	NR					▪			
	NR/SBR					▪			
	KURARAY LIQUID RUBBER LIR-403, LIR-410 as base rubber					▪			
	UV radiation						▪		

▪ : applicable

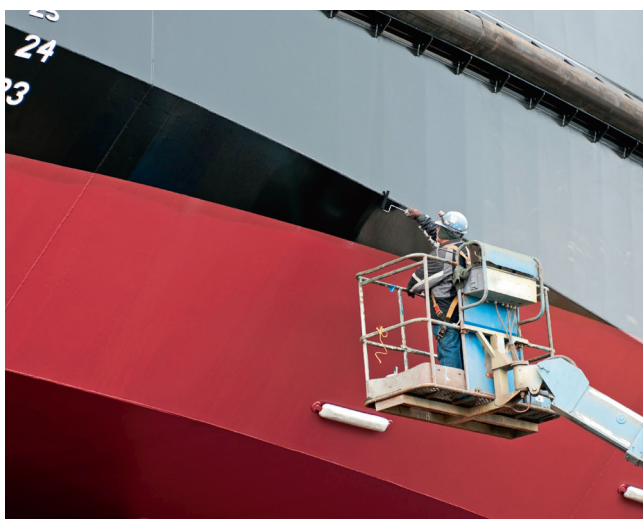

## ■ KURARAY LIQUID RUBBER IN COATINGS & SEALANTS

KURARAY LIQUID RUBBER is also used in coatings and sealants. Typical applications include automotive, construction and marine coatings and sealants.

KURARAY LIQUID RUBBER's narrow molecular weight distribution ensures minimal residuals for improved quality.

- Colorless, transparent and odorless without halogen residuals
- Selected grades are suitable for food contact applications
- Low glass transition temperature (Tg) improves low temperature properties
- Isoprene/butadiene block copolymer grade, LIR 390, provides faster reactivity

Category	Type	Grade name	Structure
LIR (Isoprene)	Homopolymer	LIR-30	$\left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \text{CH}_2 \right]_n$
		LIR-50	
	Block Copolymer	LIR-390	$\left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \text{CH}_2 \right]_m \left[ \text{CH}_2 - \text{CH} = \text{CH} - \text{CH}_2 \right]_n$
		LIR-403	$\left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \text{CH}_2 \right]_m \left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \underset{\text{O} \quad \text{O}}{\text{C}} \right]_n$
	Carboxylated	LIR-410	$\left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \text{CH}_2 \right]_m \left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \underset{\text{HC}-\text{CH}_2}{\text{C}} \right]_n$ $\text{O}=\text{C} \quad \text{C}=\text{O}$ $\text{HO} \quad \text{O}-\text{CH}_3$
		UC-102M UC-203M	$\left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \text{CH}_2 \right]_m \left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \underset{\text{HC}-\text{CH}_2}{\text{C}} \right]_n$ $\text{O}=\text{C} \quad \text{C}=\text{O}$ $\text{HO} \quad \text{O}-\text{CH}_2-\text{CH}_2-\text{O}-\overset{\text{O}}{\text{C}}-\overset{\text{CH}_3}{\text{C}}=\text{CH}_2$
	Hydrogenated	LIR-290	$\left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{CH}} - \text{CH}_2 - \text{CH}_2 \right]_m \left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \text{CH}_2 \right]_n$
Latex	LIR-700	$\left[ \text{CH}_2 - \overset{\text{CH}_3}{\text{C}} = \text{CH} - \text{CH}_2 \right]_n$	
LBR (Butadiene)	Homopolymer	LBR-302 LBR-307 LBR-305	$\left[ \text{CH}_2 - \text{CH} = \text{CH} - \text{CH}_2 \right]_n$
		LBR-352 LBR-361	$\left[ \text{CH}_2 - \text{CH} = \text{CH} - \text{CH}_2 \right]_m \left[ \text{CH}_2 - \underset{\text{CH}}{\text{CH}} \right]_n$ $\text{CH}_2$
		L-SBR (Styrene/ Butadiene)	Random Copolymer



Number of functional groups per molecule	Molecular Weight	Viscosity (Pa·s at 38 °C)	Glass Transition Temp. (°C)	Features and main applications
-	28,000	70	-63	<ul style="list-style-type: none"> <li>Reactive plasticizer (NR, IR, SBR, BR, IIR etc.)</li> <li>Tire, conveyor belt, rubber goods</li> <li>Pressure sensitive adhesives/hot melts</li> <li>Automotive sealants, coatings and adhesives</li> <li>Plasticizer for printing plates</li> <li>Binder for brake pads, grinding wheels, etc.</li> </ul>
-	54,000	500	-63	
-	48,000	400	-95	<ul style="list-style-type: none"> <li>Hot melt adhesives/PSA (SIS, SBS, EVA)</li> <li>Automotive sealants, coatings and adhesives</li> </ul>
3	34,000	200	-60	<ul style="list-style-type: none"> <li>Improves adhesion to metals and fibers</li> <li>Automotive sealants, coatings and adhesives</li> <li>Hot melt adhesives/PSA (SIS, SBS, EVA)</li> <li>Binder for brake pads, grinding wheels, etc.</li> </ul>
10	30,000	430	-59	
2	17,000	30	-60	<ul style="list-style-type: none"> <li>Low temperature reactivity</li> <li>Crosslinkable using UV</li> <li>Pressure sensitive adhesives (UV curing adhesives)</li> </ul>
3	35,000	190	-60	
-	31,000	1,200	-59	<ul style="list-style-type: none"> <li>Reactive plasticizer (EPDM)</li> <li>Hot melt adhesives (SEBS, SEPS)</li> <li>Superior heat and weather resistance</li> </ul>
-	28,000	7.5 (at 25 °C) (Solid cont.= 60wt%)	-63	<ul style="list-style-type: none"> <li>Good compatibility with NR latex</li> <li>Reactive plasticizer (NR latex, SBR latex)</li> <li>Adhesives</li> </ul>
-	5,500	0.6	-85	<ul style="list-style-type: none"> <li>Reactive plasticizer (NR, IR, SBR, BR etc.)</li> <li>Tire, printing plate</li> <li>Coagent for EPDM (peroxide curing)</li> <li>Automotive sealants, coatings and adhesives</li> <li>Hot melt/PSA</li> <li>Vinyl content: 5-70%</li> <li>Thermoset PU modification</li> </ul>
-	8,000	1.5	-95	
-	26,000	40	-95	
-	9,000	6	-60	
-	5,500	5.5	-49	
-	8,500	350	-14	<ul style="list-style-type: none"> <li>Good compatibility with S-SBR and E-SBR</li> <li>Tire and rubber goods</li> <li>Automotive sealants, coatings and adhesives</li> <li>Partially hydrogenated grades are available</li> <li>Damping material</li> </ul>
-	10,000	100 (at 60 °C)	-6	

Adding value to your products - worldwide



Kuraray is a world leader in specialty chemicals and functional materials. We are committed to developing products that ensure quality and value while helping our customers differentiate themselves from their competition.

The history of Kuraray's Elastomer Division started in 1972 with the production of polyisoprene rubber and the development of new rubber materials based on Isoprene in the Kashima Plant. From the

first production line, the Elastomer Division continuously grew and invented new products such as KURARAY LIQUID RUBBER, ISOBAM™, SEPTON™, HYBRAR™, and KURARITY™.

Kuraray strives to develop new and innovative high performance products for customers around the globe. If you would like to know more about Kuraray's Elastomer products please also visit our website [www.elastomer.kuraray.com](http://www.elastomer.kuraray.com)

#### Kuraray Co., Ltd.

Ote Center Bldg.  
1-1-3, Otemachi Chiyoda-ku  
Tokyo 100-8115, Japan  
Phone: +81 3 6701 1616  
[kuraray.liquidrubber@kuraray.com](mailto:kuraray.liquidrubber@kuraray.com)

#### Kuraray Europe GmbH

Philipp-Reis-Straße 4  
65795 Hattersheim am Main  
Germany  
Phone: +49 69 305 35849  
[elastomer@kuraray.com](mailto:elastomer@kuraray.com)

#### Kuraray America, Inc.

2625 Bay Area Blvd.,  
Suite 600, Houston TX 77058  
United States of America  
Phone: +1-281 283 1711  
[septon.sales@kuraray.com](mailto:septon.sales@kuraray.com)

#### Kuraray Trading (Shanghai) Co., Ltd.

Unit 2106, 2 Grand Gateway  
3 Hongqiao Road, Xuhui District  
Shanghai 200030, China  
Phone: +86 21 6407 9182  
[elastomer.china@kuraray.com](mailto:elastomer.china@kuraray.com)

Disclaimer: Precautions should be taken in handling and storage. Please refer to the appropriate Safety Data Sheet for further safety information. In using KURARAY LIQUID RUBBER, please confirm related laws and regulations, and examine its safety and suitability for the application. For medical, health care and food contact applications, please contact your KURARAY LIQUID RUBBER representative for specific recommendations. KURARAY LIQUID RUBBER should not be used in any devices or materials intended for implantation in the human body. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.